


Check local codes to determine requirements by opening

EASY MODEL NUMBER CREATOR

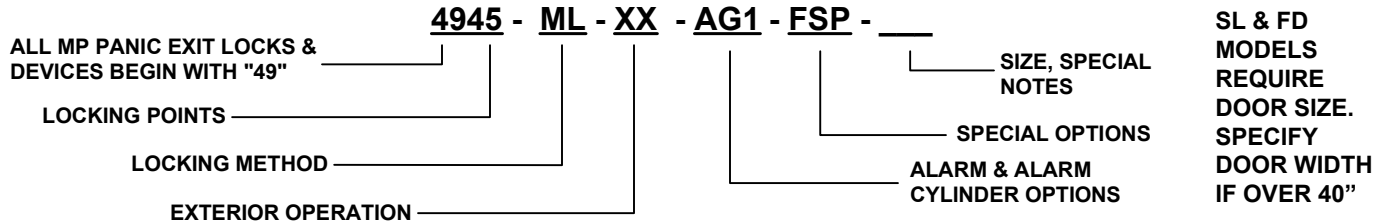

1 Locking Points

SINGLE DOOR

4945

4-Pt.
(Hinge bolt is a "fixed" bolt)



DOUBLE DOORS

4935P

3-Pt. per door (no horizontal bolt)



GATES

4922

2-Pt. (top & horizontal bolt)



OTHERS

- 4931 (Bottom, top & hinge)
- 4932 (Horizontal, top & hinge)
- 4933 (Horizontal, bottom & hinge)

EXIT LOCKS

- ML Manual Lock (Re-lock by pulling paddle)
- SL Self-Lock (Trigger activated as door closes)

FIRE-RATED DEVICE

- FD UL listed multi-point deadbolt exit device, fire-rated for 3 hrs. Includes extended paddle and return

3 Exterior Entry Options

-XX is exit only model

ML-Single Door

- PC-regular Cylinder:
- PR-removable core



TG

Easy-to-operate thumb-piece
TG is for ML single or double

SL or FD-Single Or Double Door

- LL - key activated lever trim
- LA - key or AC release
- LD - key or DC release
- CF - classroom function
- LQ - quick-connect wiring



ML-Gate

BF



removable core cylinder, no pull handle

3a Cylinder Options

PC or PH

- RC Rim cylinder

PR, PB or BF

- BC Removable core rim cylinder

TG, LL, LA, LD

- MC Mortise cylinder
- NC Removable core mortise cyl.

4 Alarm & Signaling Options

All alarms are wall-mounted; key momentarily silences and resets alarm

No Alarm

- AG0 No alarm or signal
- MSO Monitor signal only

Battery Powered

- AG1 9v battery included
- L Last Door Out
- B Battery Saver



110v AC Powered

- AG2 Single Door Alarm with GelCel battery back-up
- AG3 Keyswitch for AG2 or AG3



Door Elements For Multi-Door Alarm System

- AG3 Door module #DM1 (No local siren) Requires single gang box
- AG3DS Door module, local siren and keyswitch



Single door or multi-door alarm to be determined later:

AG4

Key switch only - alarm ordered separately



4a Cylinder & Mode Option

- OA Keyswitch turns alarms on/off for extended periods
- Cylinder: Use nomenclature MC or NC (from 3a)

5 Special Options

- SB Strike Bracket (mount on inactive door of a pair)



- EBT Extra Bracket & Thru-Bolt Plate




- PE Paddle Extension (If required by code)



- BUP Stainless Steel (4"x8") Bolt Underplate For Extra Reinforcement



- FSP Set of 2 Stainless Steel Plates (4"x4") & Brackets



- CT Digital Counter (monitors door usage)



- CADA Set of 1 Paddle Extension 1 Paddle Deflector 1 Channel Deflector (See photos on rear)

Multi-Door Alarm

- Order separately
- #49DPS-5
- Will operate up to 5 doors. Add "AG3" or "AG4" designation to each door lock for operation.
- #49DM1
- For use with each "AG4" connected to #49DPS5



Additional ordering information:

Manual Locking: Shipped for 3'x7' doors. Can be field cut for shorter. Specify size if taller.

Self-Locking & Fire Rated: Shipped for 3'x7' doors. Can be field adjusted downward to 79" height. Specify height if taller than 84" or less than 79". If exterior operation is ordered, LHR or RHR must be designated.