



Multi-Door Alarm For MP4900™


#49DPS-5

Monitor up to 5 doors from a remote location with one power supply.



SECURITECH™'s multi-door alarm allows a facility to monitor the status of their exit doors and have the alarm sound at a central (or staffed) location. This is especially useful where exit doors are located at an unsupervised location within a large space. A siren at the door may not be enough to alert staff that someone has violated the door and exited.

49DPS-5 is ideal for retail and other large facilities. A powerful 110db siren sounds when any door has been opened. Individual LEDs on the front of the alarm box indicate which particular door has been opened. An optional LED and/or siren is available at the individual door.

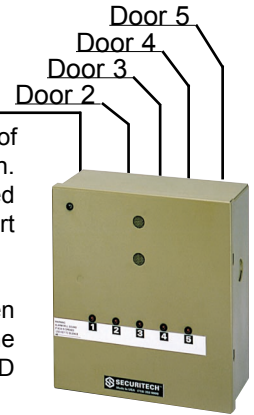


To silence an activated door alarm, a key must be inserted into the key switch cylinder located at the door. The door may be relocked manually, however, the alarm will sound until reset by key.

49DPS-5 Product Information

Green LED indicates "Power ON"

Red LEDs Individual door alarm activity indicator



Note: Not shown, "tamper switch", located behind cover, (sounds alarm when power supply is forced open) and "Key Switch", located on side of power supply and used to silence "tamper" alarm.

Elements

- 110db Siren
- AC "Power On" LED
- Recharging Battery
- LED activity indicator per door
- Tamper switch
- Key switch for power supply (shunts alarm when opening)

Dimensions: 7-1/2"w x 8"h x 3-1/2"d

Construction: Steel, Painted

Siren: 110db

Battery Back-up: Rechargeable 12vDC GelCel

Installation Requirements:

Power: 110v, direct power

Mounting: 4 screws at location to be determined

Max Distance: 1,000 ft. to door module

Wires: Three 18 gauge wires run to each door module

Ordering Information:

Order one 49DPS-5 per location to accommodate up to 5 doors. One #49DM1 is needed for each door to be used in the system and is supplied with key switch box as part of the exit lock.

Optional Alarm System Output:

If a facility has a central station alarm system, 49DPS-5A includes an output for the alarm system.

Mounting Information:

Select a location (e.g. near a manager's office, on the selling floor, near cashier) where the siren can be heard and the LEDs indicating door lock status can be observed.

Key Switch & Individual Door Module



AG3 (ordered as part of exit lock)

- Includes #49DM1 Module
- Momentary key switch silences alarm
- To be used with 49DPS-5 power supply
- Optional LED Indicator to show alarm is activated
- Optional siren at door

AG3-OA-

- provides on/off switch, LED indicator

49DM1 is mounted within junction box above door (junction box by others). Contains circuit board and optional LED and door siren output.

MODELS:

49DM1 standard door module

- L With LED at door
- S With Siren at door
- LS With LED & Siren at door



****One door module needed for either single or double opening****