


MULTI-POINT AUXILIARY LOCK
Mortise Lockset With 2-Point Vertical Locking



Key Lockable Flushbolts
 Operated By A Single Cylinder

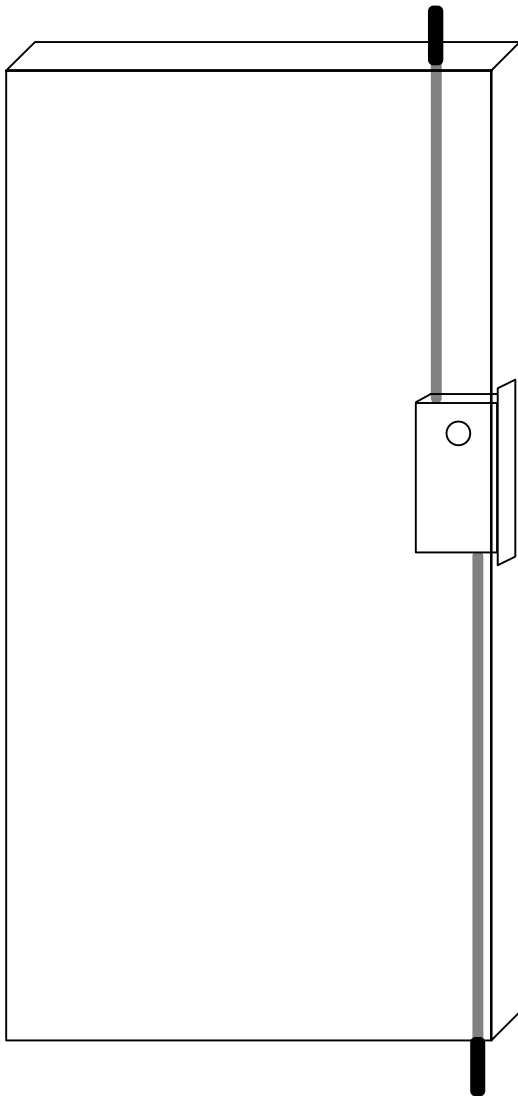

Usage

Functions as "lockable" flushbolts on inactive leaf of a pair of doors. Turning key or turnpiece projects or retracts both vertical deadbolts simultaneously. May not be used in fire-rated openings.

Door Information

Preparation: ANSI Mortise Opening (1-1/4"x8"). Face hole for cylinder(s) only as per function. Strike prep on this door may be required for lock from active leaf. Check primary lock requirements.

Cylinder Location: 50" from bottom of opening, or as needed so as not to interfere with locks and hardware on active leaf. Cylinder(s) by others.

Height Adjustment: Vertical bolts are connected to the lock body by threaded rods. Rod length can be cut-down in the field, if needed. Supplied standard for a 7' door. Specify height for taller doors.

Type: Vertically Stiffened Hollow Metal Recommended. 5" min. from edge of door to first stiffener. Vertical rods travel between edge of door and stiffener.

Top & Bottom Edges: "U" Channel recommended. Removable cap for top of exterior doors. Holes for edge plates can be field drilled and do not require factory templating.

Header Strike: Not required. Hole to be field drilled and smoothed.

Dustproof Strike: Supplied for field installation into floor or saddle.

Cylinder Information

Standard mortise cylinder required (by others).



Cloverleaf cam ("wing-type") required.

Notify factory of special requirements (e.g. high-security or removable core cylinders)

Available Models

52XXV-F16	Double Cylinder Keyed both sides
52XXV-F17	Single Cylinder Key exterior; thumbturn interior
52XXV-F18	Single Cylinder Key exterior; no interior operation

"V" - Designates vertical bolt only model (no horizontal deadbolt).
 Custom models available upon request. Securitech does not provide cylinders.

j:\!!! binder 2001\4CAT 52XX v2.vsd\page-1las of 2/26/02

made in u.s.a.