

SECURITECH WEATHERGUARD™

Cylinder Protector

All holes are to be drilled on the outside face of the door above the cylinder.

**Position the marking template over the cylinder.
Mark and drill holes.**

File the space between the top 2 holes to create a tear drop.


Insert the top bolt with the nut through the hole and slide down. Then install the bottom two screws.



SECURITECH GROUP, INC.

54-45 44TH STREET MASPETH, NY 11378

(800) 622-LOCK (718)392-9000 FAX: (718)392-8944

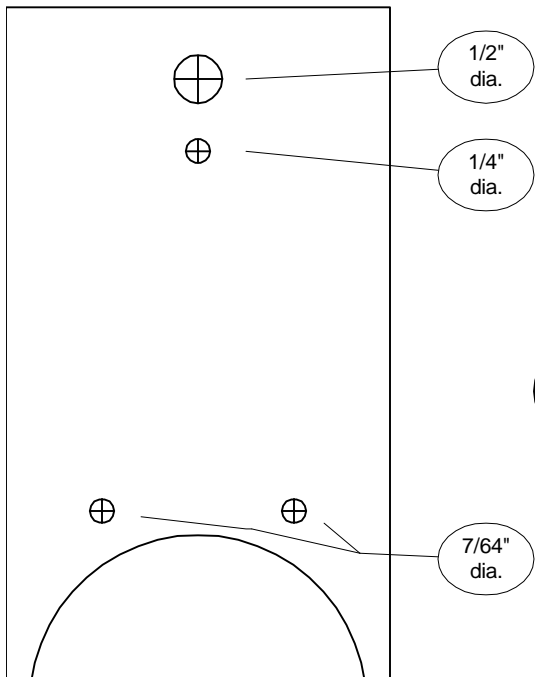

SECURITECH WEATHERGUARD™

Cylinder Protector

All holes are to be drilled on the outside face of the door above the cylinder.

**Position the marking template over the cylinder.
Mark and drill holes.**

File the space between the top 2 holes to create a tear drop.

Insert the top bolt with the nut through the hole and slide down. Then install the bottom two screws.



SECURITECH GROUP, INC.

54-45 44TH STREET MASPETH, NY 11378

(800) 622-LOCK (718)392-9000 FAX: (718)392-8944