



SECURITECH™


Template #63PT1 & Installation Instructions

For use with Securiguard™ Mounted on Plate with Pull Handle

Hole Size Chart


Hole Name	Interior Size(Dia.)	Exterior Size(Dia.)
B	5/16"	1/4"

Installation Instructions

- 1) Place Hole "A", of this page, over the outside cylinder. You may find it easier to cut out hole "A" before you place it on the door.
- 2) Make sure the template is parallel with the edge of the door and mark the four mounting holes "B".
- 3) Remove the template and drill the four holes as follows: Holes "B" drill 1/4" through the door. Make sure you drill straight.
- 4) Enlarge the four mounting holes on the interior side of the door to 5/16" (see chart above).
- 5) Place the Securiguard™ with the mounting plate over the cylinder so that the four mounting bolts go through the four holes.
- 6) Place the two hole underplate over the holes. 
- 7) Fasten the plate with four One-Way caps supplied.

Parts List:

QTY	Description
1	Exterior Pull Plate with Securiguard™
2	Keys for the Securiguard™
4	One-Way Caps
2	Underplates for the one way caps

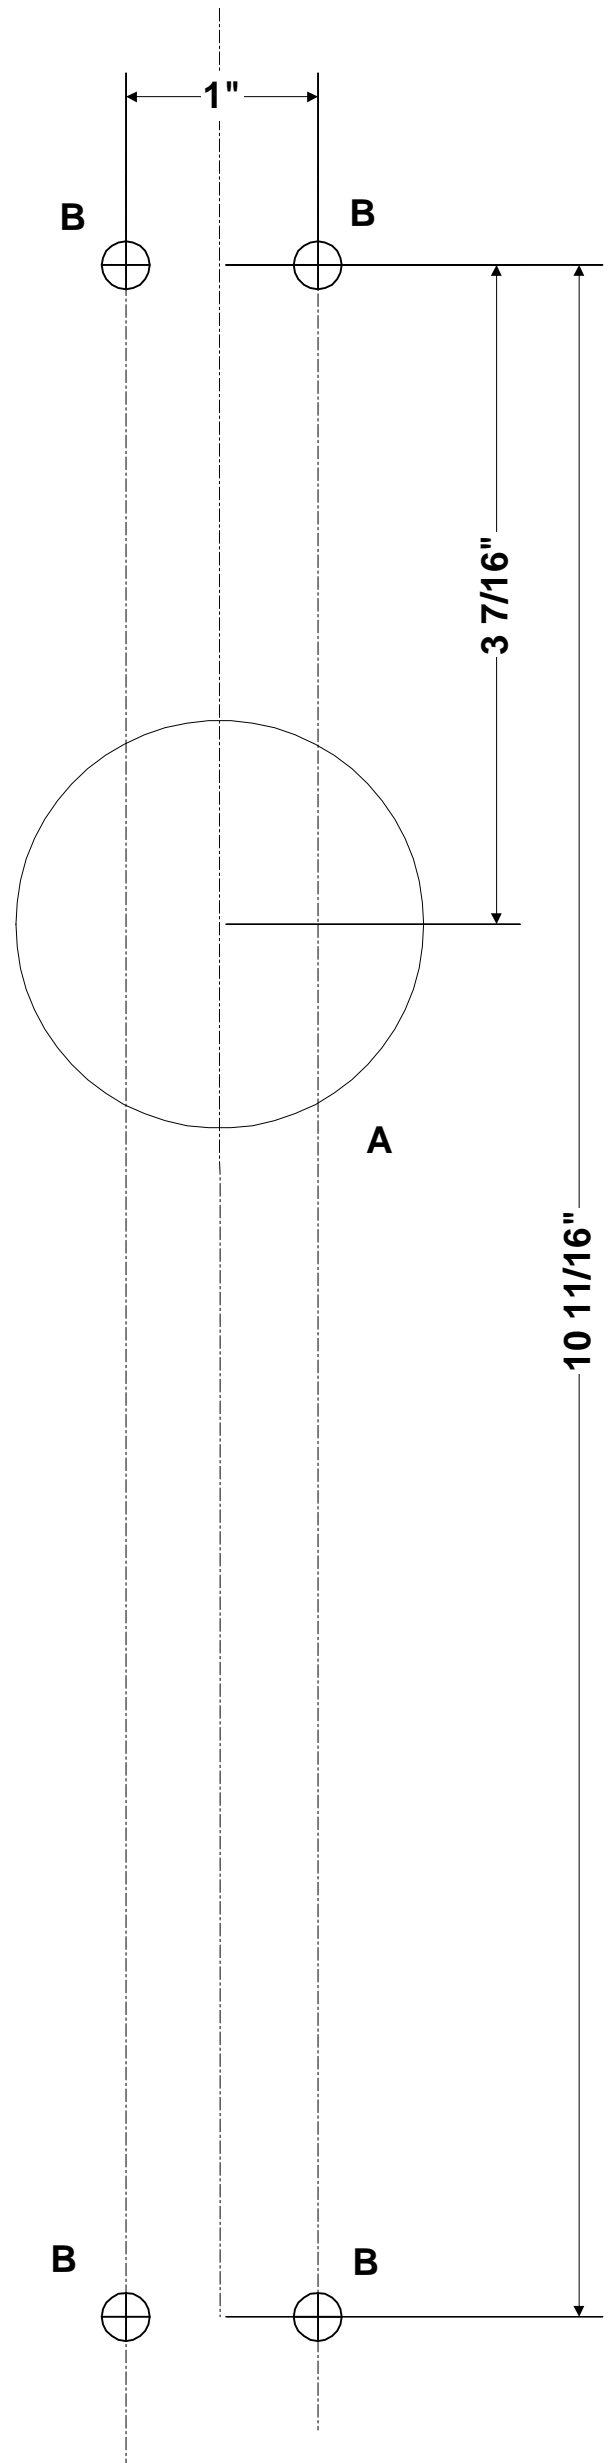

SECURITECH GROUP, INC.

54-45 44TH STREET MASPETH, NY 11378

(718)392-9000 FAX: (718)392-8944

T63PT1.AS OF 2/9/99