


FLAT TO 1/8" IN 2" FRONT BEVEL
ADJUST TEMPLATE FOR DOOR BEVEL

LIGHT holes are interior.


DARK holes are for exterior.

Hole Dimension Chart		
Hole Designation	Interior	Exterior
Size(Dia.)	Size(Dia.)	Size(Dia.)
A Trim Mounting	3/8"	1/4"
B Cylinder Locking Post	3/8"	3/8"
C Wire Access (For Electric Models Only)	None	1/2"
D Spindle	1"	1"
E Surface Housing Mounting Holes	#14 Screws	None

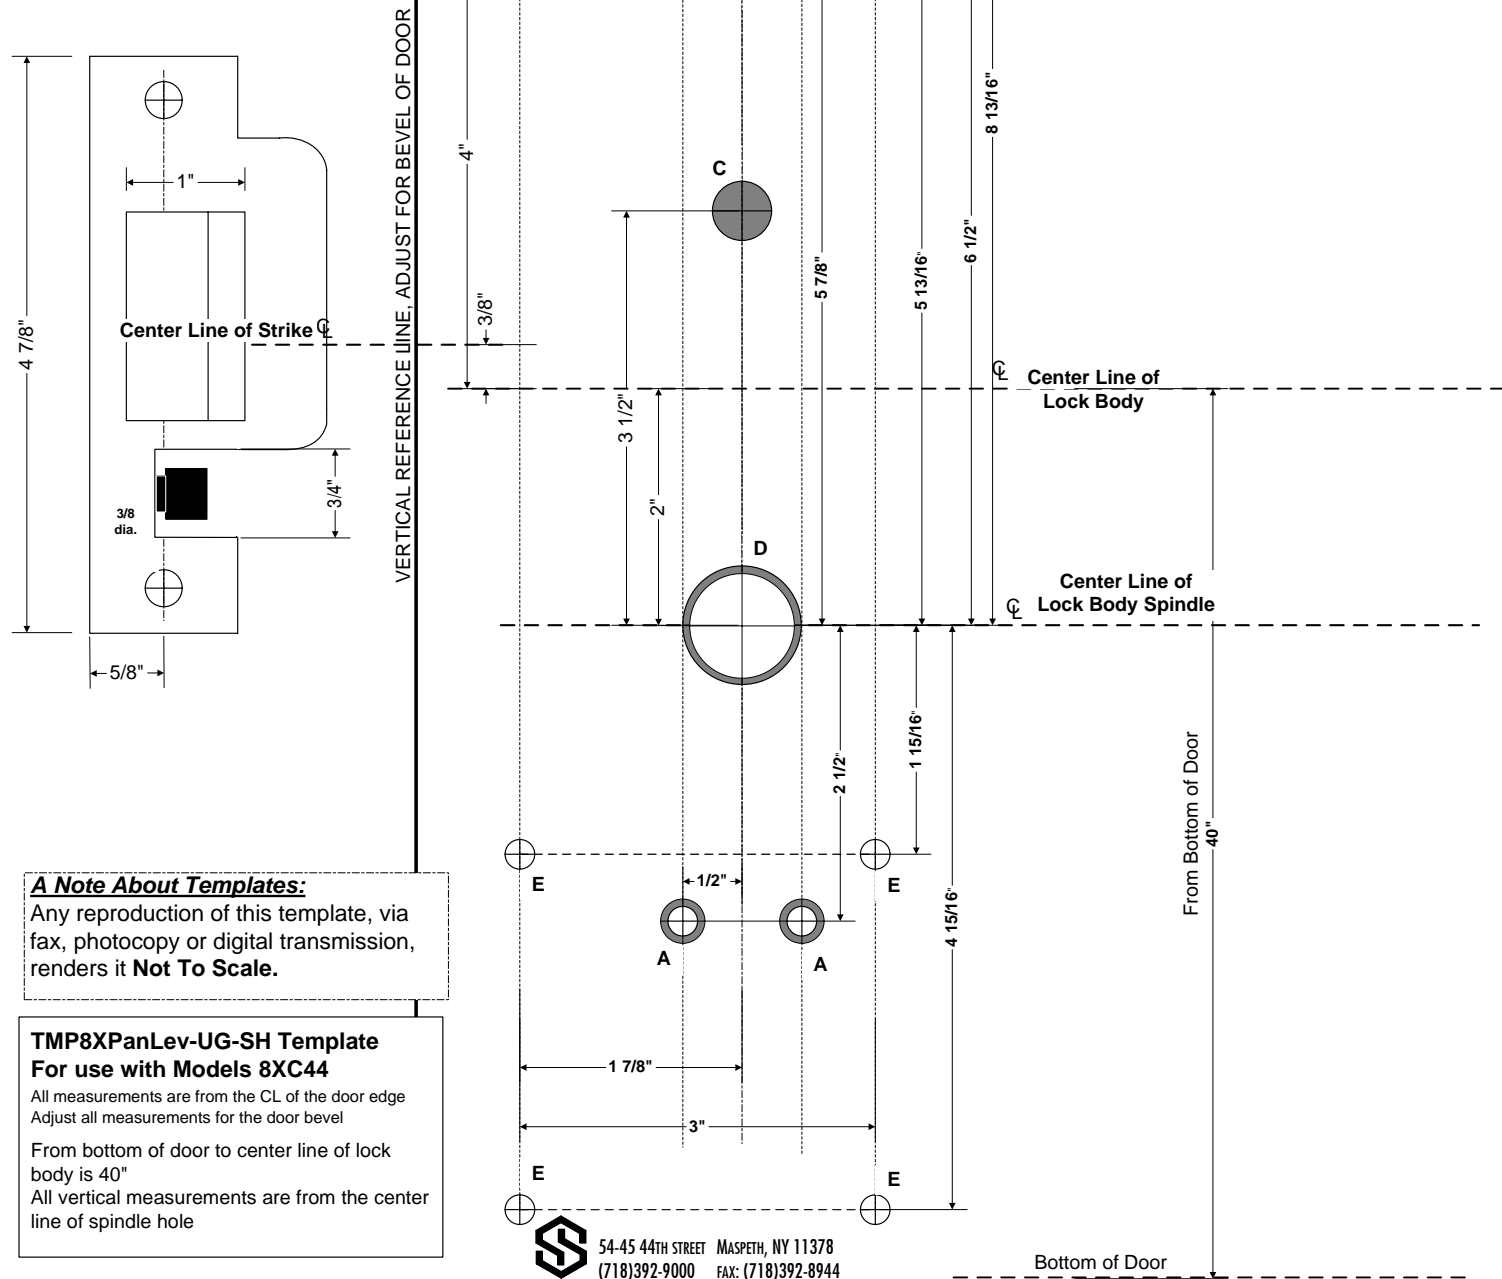


A Note About Templates:
Any reproduction of this template, via fax, photocopy or digital transmission, renders it **Not To Scale**.

TMP8XPanLev-UG-SH Template
For use with Models 8XC44
All measurements are from the CL of the door edge
Adjust all measurements for the door bevel
From bottom of door to center line of lock body is 40"
All vertical measurements are from the center line of spindle hole


 54-45 44TH STREET MASPEETH, NY 11378
(718)392-9000 FAX: (718)392-8944

FLAT TO 1/8" IN 2" FRONT BEVEL
ADJUST TEMPLATE FOR DOOR BEVEL

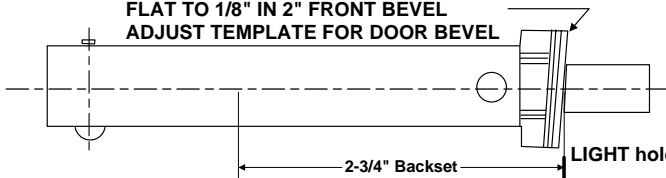

LIGHT holes are interior .

DARK holes are for exterior.





Hole Dimension Chart

Hole Designation Size(Dia.)	Interior Size(Dia.)	Exterior Size(Dia.)
A Trim Mounting	3/8"	1/4"
B Cylinder Locking Post	3/8"	3/8"
C Wire Access (For Electric Models Only)	None	1/2"
D Spindle	1"	1"
E Surface Housing	#14 Screws	None

Mounting Holes

Top Of Mortise Lock Body

VERTICAL REFERENCE LINE, ADJUST FOR BEVEL OF DOOR

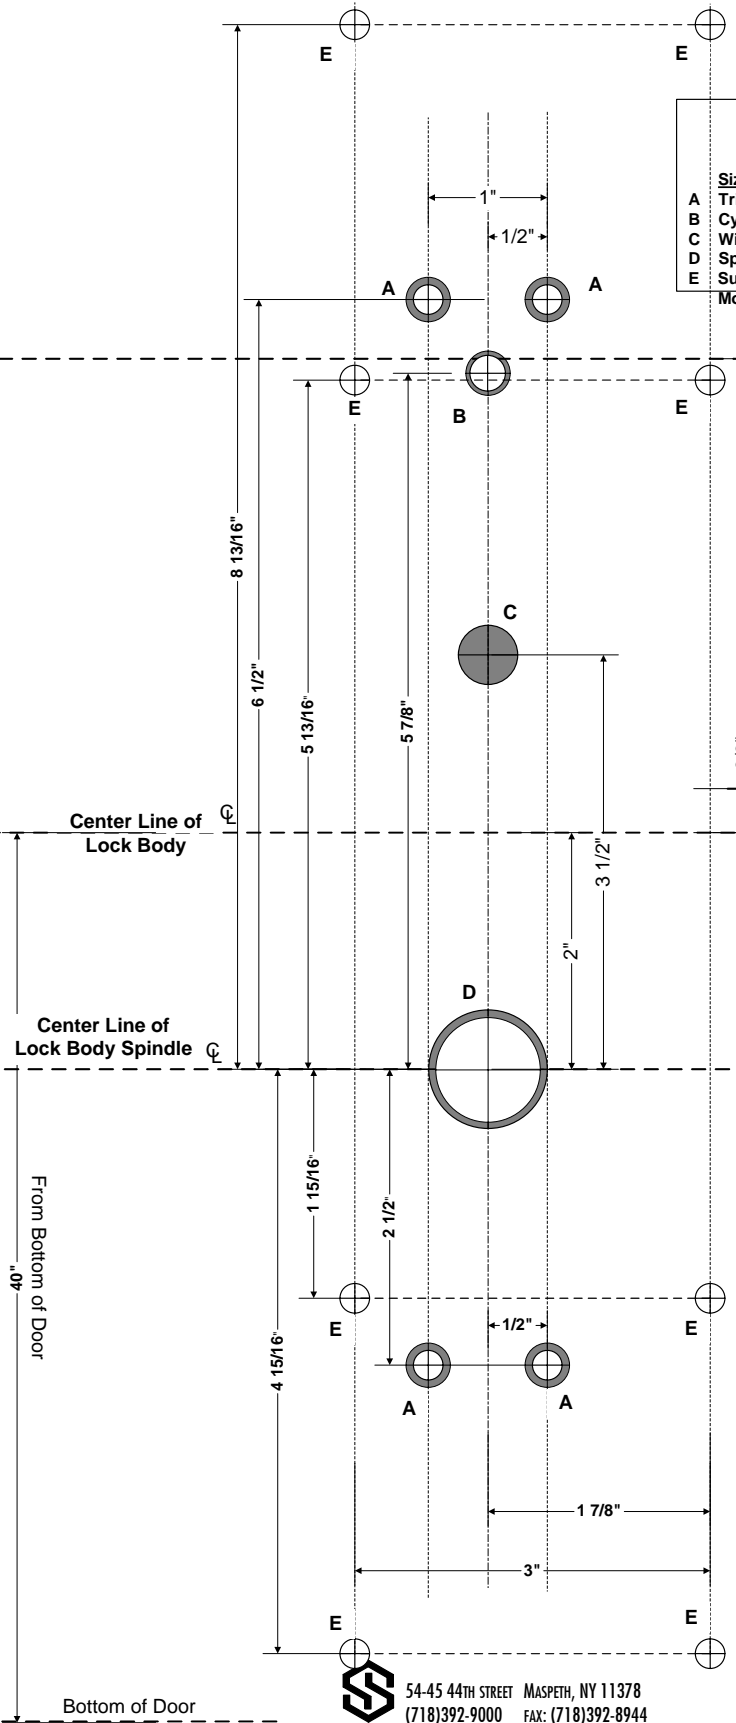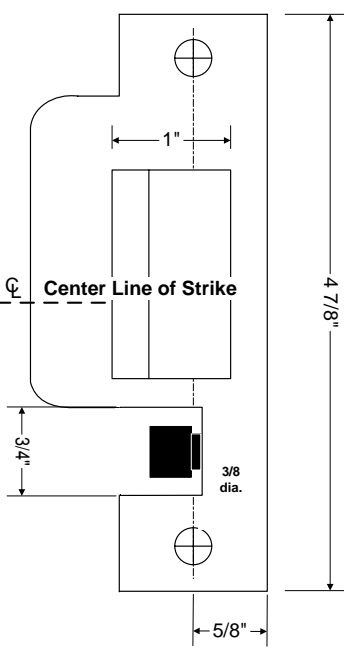

A Note About Templates:
Any reproduction of this template, via fax, photocopy or digital transmission, renders it **Not To Scale**.

TMP8XPanLev-UG-SH Template
For use with Models 8XC44
All measurements are from the CL of the door edge
Adjust all measurements for the door bevel
From bottom of door to center line of lock body is 40"
All vertical measurements are from the center line of spindle hole

54-45 44TH STREET MASPETH, NY 11378
(718)392-9000 FAX: (718)392-8944